

11-07-00

A

11/06/00

11/06/00
Jc916 U.S. PTO
09/709050

Express Mail Label No. EL251924800US

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
B588-015

Total Pages in this Submission
4

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

IMAGE SEARCH METHOD AND APPARATUS

and invented by:

Miyuki Enokida, Kentaro Matsumoto, Kunihiro Yamamoto and Kiyoshi Kusama

If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 38 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☐ Cross References to Related Applications (if applicable)
 - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
 - d. ☐ Reference to Microfiche Appendix (if applicable)
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings (if drawings filed)
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classifiec. Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.

B588-015

Total Pages in this Submission

4

Application Elements (Continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)
- a. ☒ Formal Number of Sheets 14 (Figs 1-14)
- b. ☐ Informal Number of Sheets _____
4. ☐ Oath or Declaration
- a. ☐ Newly executed (original or copy) ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)
- c. ☐ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Computer Program in Microfiche (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all must be included)
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy (identical to computer copy)
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(B) Statement (when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS Citations
12. ☒ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☒ Certificate of Mailing
- ☐ First Class ☒ Express Mail (Specify Label No.): EL251924800US

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.

B588-015

Total Pages in this Submission

4

Accompanying Application Parts (Continued)

15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)

16. ☒ Additional Comments (please identify below):

Claim is made under 35 U.S.C. § 119 for the benefit of the filing date of Japanese Patent Application Nos. 11-318880 filed November 9, 1999 and 11-323196 filed November 12, 1999 in Japan. Certified copies of the applications will be filed in due course.

Request That Application Not Be Published Pursuant To 35 U.S.C. 122(b)(2)

17. ☐ Pursuant to 35 U.S.C. 122(b)(2), Applicant hereby requests that this patent application not be published pursuant to 35 U.S.C. 122(b)(1). Applicant hereby certifies that the invention disclosed in this application has not and will not be the subject of an application filed in another country, or under a multilateral international agreement, that requires publication of applications 18 months after filing of the application.

Warning

An applicant who makes a request not to publish, but who subsequently files in a foreign country or under a multilateral international agreement specified in 35 U.S.C. 122(b)(2)(B)(i), must notify the Director of such filing not later than 45 days after the date of the filing of such foreign or international application. A failure of the applicant to provide such notice within the prescribed period shall result in the application being regarded as abandoned, unless it is shown to the satisfaction of the Director that the delay in submitting the notice was unintentional.

UTILITY PATENT APPLICATION TRANSMITTAL
(Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
B588-015

Total Pages in this Submission
4

Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	31	- 20 =	11	x \$18.00	\$198.00
Indep. Claims	3	- 3 =	0	x \$80.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$710.00
OTHER FEE (specify purpose) _____					\$0.00
TOTAL FILING FEE					\$908.00

- ☒ A check in the amount of **\$908.00** to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. **18-1644** as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of _____ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: November 6, 2000

CC:


Signature

Marylee Jenkins
Reg No. 37,645
Attorney for Applicant
Filed Under §1.34(a)
Robin, Blecker & Daley
330 Madison Avenue
New York, NY 10017

PATENT

B588-015

Express Mail No.: EL251924800US

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants : Miyuki Enokida, et al.
Serial No. : Unassigned
For : IMAGE SEARCH METHOD AND APPARATUS
Filed : November 6, 2000
Examiner : Unassigned
Art Unit : Unassigned

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

PRELIMINARY AMENDMENT

Please amend the above-identified application as follows prior to examination thereof.

In the Specification

At page 1, line 13, after "into", insert -- : --.

At page 2, line 10, after "do", insert -- a --.

At page 5, line 4, change "flow chart" to -- flowchart --.

At page 5, line 10, change "flow chart" to -- flowchart --.

At page 5, line 13, change "flow chart" to -- flowchart --.

At page 5, line 16, change "flow chart" to -- flowchart --.

At page 5, line 19, change "flow chart" to -- flowchart --.

At page 5, line 26, change "flow chart" to -- flowchart --.

At page 6, line 4, change "flow chart" to -- flowchart --.

At page 7, line 8, change "flow chart" to -- flowchart --.

At page 10, line 6, change "flow chart" to -- flowchart --.

At page 10, line 10, change "flow chart" to -- flowchart --.

At page 10, line 20, change "flow chart" to -- flowchart --.

At page 11, line 20, change "flow chart" to -- flowchart --.

At page 12, line 10, change "flow chart" to -- flowchart --.

At page 18, line 23, change "sex" to -- six --.

At page 19, line 2, change "search from" to -- a search of --.

At page 20, line 5, change "flow chart" to -- flowchart --.

At page 21, line 24, change "search" to -- searching --.

At page 21, line 25, change "search" to -- searching --.

At page 23, line 25, change "flow chart" to -- flowchart --.

At page 24, line 1, change "the" to -- that --.

At page 24, line 21, delete "the".

REMARKS

The above amendments to the Specification are entered to correct various typographical and grammatical errors therein. Please make these amendments prior to examination of the application.

Dated: November 6, 2000

Respectfully submitted,



ROBIN, BLECKER & DALEY
330 Madison Avenue
New York, New York 10017
T (212) 682-9640

Marylee Jenkins
Reg. No. 37,645
Attorney for Applicant
Filed Under § 1.34(a)

EL251924800US

TITLE OF THE INVENTION
IMAGE SEARCH METHOD AND APPARATUS

FIELD OF THE INVENTION

5 The present invention relates to an image search method and apparatus for searching for desired image data from a plurality of image data, and a medium.

BACKGROUND OF THE INVENTION

10 Various means for searching for a desired image from an image database in which a plurality of image data are stored have been proposed. Search processing methods of this type are roughly classified into

· methods of linking nonimage information such as
15 a keyword or image sensing date and time to image data and executing search on the basis of it, and

· methods of executing search on the basis of a feature amount (information such as luminance/color difference information, image frequency, or histogram)
20 of an image itself.

In the latter methods, a method of presenting an image to an image database and searching for an image using the feature amount of the image as a search key is particularly called similar image search. It has an
25 advantage that an intuitively understandable search interface can be provided to a user who has no special

knowledge about image processing.

This similar image search is sometimes executed on the basis of, e.g., the user's memory or an image idea uniquely presented by the user. Such a method is particularly effective when the user has no image data serving as a search key. However, similar image search based on such a manually drawn image is difficult with the above-described user interface of similar image search.

The user is also forced to do cumbersome operation of, e.g., selecting a candidate image by the above-described keyword search and executing similar image search using the image obtained by this method as a key image.

In addition, in executing similar image search by "manually" drawing an image that the user remembers and using this image as a key image, a problem arises due to the fact that the human memory is ambiguous. Especially, for "colors", a person often remembers only characteristic colors, and also often remembers colors such as "red" close to primary colors.

For this reason, even when the colors (RGB) of a manually drawn image are directly used as image search keys, it is often difficult to search for an image desired by the user. That is, in executing search using a manually drawn image as an original image, the

user interface of similar image search is hard to use or unusable.

SUMMARY OF THE INVENTION

5 The present invention has been made in consideration of the above-described problems, and has as its object to enable similar image search while accurately reflecting the user's intention.

10 In order to achieve the above object, according to the present invention, there is provided an image search method of searching for a desired image from a plurality of images stored in storage means, comprising the setting step of setting a weight value in correspondence with a property of feature amount used
15 in similarity calculation of the image, the calculation step of calculating similarity between a designated search source image and each of the plurality of images on the basis of a feature amount of the designated search source image, a feature amount of each of the
20 plurality of images, and the weight value set in the setting step, and the acquisition step of acquiring an image as a search result from the plurality of images on the basis of the image similarity calculated in the calculation step.

25 According to the present invention, there is also provided an image search apparatus for searching for a

desired image from a plurality of images stored in
storage means, comprising setting means for setting a
weight value in correspondence with a property of
feature amount used in similarity calculation of the
5 image, calculation means for calculating similarity
between a designated search source image and each of
the plurality of images on the basis of a feature
amount of the designated search source image, a feature
amount of each of the plurality of images, and the
10 weight value set by the setting means, and acquisition
means for acquiring an image as a search result from
the plurality of images on the basis of the image
similarity calculated by the calculation means.

Other features and advantages of the present
15 invention will be apparent from the following
description taken in conjunction with the accompanying
drawings, in which like reference characters designate
the same or similar parts throughout the figures
thereof.

20

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated
in and constitute a part of the specification,
illustrate embodiments of the invention and, together
25 with the description, serve to explain the principles
of the invention.

Fig. 1 is a block diagram showing the arrangement of an image search apparatus according to the first embodiment;

Fig. 2 is a flow chart showing the schematic flow of image search according to the first embodiment;

Fig. 3 is a view showing an operation window displayed on a display section 103 in step S21;

Fig. 4 is a view for explaining an image segmented state in the first embodiment;

Fig. 5 is a flow chart for explaining image feature amount calculation processing according to the first embodiment;

Fig. 6 is a flow chart for explaining a method of calculating the average values of the R, G, and B values in each region;

Fig. 7 is a flow chart showing inter-image distance calculation processing according to the first embodiment;

Fig. 8 is a flow chart showing processing of selecting a similar image;

Fig. 9 is a view showing an operation window displayed on the display section 103 in step S24;

Fig. 10 is a view for explaining a window structure for interactive image presentation in the second embodiment;

Fig. 11 is a flow chart showing weight setting

processing according to the second embodiment;

Fig. 12 is a view showing an operation window according to the third embodiment;

Fig. 13 is a flow chart showing inter-image distance calculation processing according to the third embodiment; and

Fig. 14 is a view for explaining a window structure for interactive image presentation in the fourth embodiment.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Preferred embodiments of the present invention will now be described in detail in accordance with the accompanying drawings.

[First Embodiment]

Fig. 1 is a block diagram showing the arrangement of an image search apparatus (computer system) according to the first embodiment.

Referring to Fig. 1, a CPU 101 controls the entire system. A keyboard 102 is used to input a user's instruction operation to the system together with a mouse 102a. A display section 103 is constructed by a CRT or liquid crystal panel. A ROM 104 and RAM 105 constitute the storage device of the system and store a program to be executed by the CPU

101 or data to be used by the system. A hard disk device 106 and floppy disk device 107 constitute an external storage device used by the file system of the system. Image data as a target of search processing
5 (to be described later) is stored in this external storage device. Reference numeral 108 denotes a printer.

Fig. 2 is a flow chart showing the schematic flow of image search according to the first embodiment. In
10 step S21, the user draws an illustration similar to the desired image on the display section 103. In step S22, the feature amount of the drawn image is calculated. In step S23, a similar image is searched on the basis of the feature amount. In step S24, similar image data
15 obtained by the search is displayed on the display section 103. Each of these steps will be described below in detail.

<Description of Step S21>

Fig. 3 is a view showing an operation window
20 displayed on the display section 103 in step S21. Reference numeral 31 denotes a user drawing region; 32, color designation scroll bars; 33, a clear button; 34, an undo button; 35, radio buttons used to designate the line width of a pen; 36, tool pallet buttons; 37, a
25 search execution button, and 38, a set button used to set a condition for the search.

The user can draw an illustration similar to the image to be searched in the user drawing region 31 using the mouse 102a, the drawing tools realized by software, and the like. The outline of operations of the drawing tools used to draw an illustration will be described below.

The color designation scroll bars 32 are used to designate the color of a pen to be used for drawing. R, G, and B values are designated sequentially from the upper side. When the clear button 33 is pressed, the entire drawing region 31 is made white to initialize the drawing region 31. When the undo button 34 is pressed, the immediately preceding drawing operation is canceled to restore the previous state. The line width of the pen to be used for drawing in the drawing region 31 can be designated using the radio buttons 35. When the left "pen" button of the tool pallet 36 is selected, the user can draw a free line on the drawing region 31 using the pointing device 102a. When the central "straight line" button of the tool pallet 36 is selected, a straight line can be drawn by designating the start and end points of the straight line using the pointing device 102a. When the right "circle" button of the tool pallet 36 is selected, a circle can be drawn by designating the center and radius of the circle, like the "pen" or "straight line" button.

When an illustration is drawn in the drawing region 31 using the above drawing tools, and the search execution button 37 is pressed, processing advances from step S21 to step S22.

5 Before pressing the search execution button 37, a similar image search condition for processing from step S22 can be changed by operating the set button 38. More specifically, when the user presses the set button 38, a setting menu 39 is displayed in which, for
10 calculation of similarity in similar image search, "a uniform weight for the entire image (entire image)" or "an increased weight for the central portion of the image (central portion)" can be selected.

<Description of Step S22>

15 In step S22, the image feature amount of the illustration is calculated. In this embodiment, the image is segmented into a predetermined number of regions, feature amounts are calculated in units of regions, and the similarity is calculated using these
20 feature amounts. Fig. 4 is a view for explaining an image segmented state in the first embodiment. As shown in Fig. 4, the size of the drawing region 31 is W pixels (horizontal) × H pixels (vertical). In this embodiment, this region is segmented into three parts
25 in the horizontal direction and two parts in the vertical direction, i.e., a total of six parts, which

are represented as region (0,0),..., region (2,1)
sequentially from the upper left corner. The average
values of R, G, and B values in each region are
calculated, so a total of 18 numerical values are used
5 as image feature amounts of the illustration.

Fig. 5 is a flow chart for explaining image
feature amount calculation processing according to the
first embodiment. The flow of feature amount
calculation processing will be described with reference
10 to the flow chart shown in Fig. 5. In step S51, a
variable k is initialized to value "0". In step S52, a
variable j is initialized to value "0". In step S53, a
variable i is initialized to value "0". In step S54,
the average value of R values in a region (i,j) is
15 substituted into a kth element d(k) of an array d. In
a similar manner, the average value of G values and the
average value of B values are substituted into elements
d(k+1) and d(k+2), respectively. The method of
calculating the average values of the R, G, and B
20 values will be described later using the flow chart
shown in Fig. 6.

In step S55, the variable k is incremented by
three. In step S56, the variable i is incremented by
one. In step S57, the variable i is compared with
25 value "2". If the variable i is larger than "2", the
flow advances to step S58. Otherwise, the flow returns

to step S54. In step S58, the variable j is incremented by one. In step S59, the variable j is compared with value "1". If the variable j is larger than "1", the processing is ended. Otherwise, the flow
5 returns to step S53.

When the above processing is ended, the image feature amounts of the illustration are stored in an array $d()$ having 18 elements. In this case, to calculate the feature amounts, the image is segmented
10 into six rectangular regions having the same area. However, the segmentation method is not limited to this. For example, the shape of a region is not limited to a rectangular shape and may be more complex. The number of segments is not limited to six. When the number of
15 segments is increased/decreased, the number of elements of the array for storing the feature amounts is not 18 but increases/decreases in accordance with the number of segments, so the values to be used for determination in steps S57 and S59 also change.

20 Fig. 6 is a flow chart for explaining a method of calculating the average values of the R, G, and B values in each region. Assume that the image data is stored in three arrays $R(X,Y)$, $G(X,Y)$, and $B(X,Y)$. In this case, $0 \leq X < W$, and $0 \leq Y < H$, and the origin
25 $(0,0)$ is set at the upper left corner of the image. In the following flow, the average densities in partial

regions of $X_0 \leq X < X_1$ and $Y_0 \leq Y < Y_1$ are calculated, and the average values of R, G, and B values are substituted into variables DR, DG, and DB, respectively.

In step S54, when the image is equally segmented
5 into 3×2 , as shown in Fig. 4, the values X_0 , X_1 , Y_0 , and Y_1 in the region (i,j) correspond to

$$X_0 = W \times i/3, X_1 = W \times (i + 1)/3$$

$$Y_0 = H \times j/2, Y_1 = H \times (j + 1)/2$$

Hence, after the constants X_0 , X_1 , Y_0 , and Y_1 are
10 initialized to the above values, the flow chart shown in Fig. 6 is executed.

First, in step S61, the variables DR, DG, and DB are initialized to value "0". In step S62, the variable Y is initialized to the value Y_0 . In step S63,
15 the variable X is initialized to the value X_0 . In step S64, the value $R(X,Y)$ is added to the variable DR. In a similar manner, the values $G(X,Y)$ and $B(X,Y)$ are added to the variables DG and DB, respectively. In step S65, the variable X is incremented by one. In
20 step S66, the variable X is compared to the value X_1 . If the two values equal, the flow advances to step S67; otherwise, the flow returns to step S64. In step S67, the variable Y is incremented by one. In step S68, the variable Y is compared to the value Y_1 . If the two
25 values equal, the flow advances to step S69; otherwise, the flow returns to step S63. By repeating steps S63

to S68, the sums of color component values corresponding to all pixels in the region (i,j) are obtained as the values DR, DG, and DB for the R, G, and B color components.

5 In step S69, each of the values of variables DR, DG, and DB is divided by $(X1 - X0) \times (Y1 - Y0)$, which is the total number of pixels in the region. More specifically, the values DR, DG, and DB are average densities obtained by dividing the sums of pixel
10 densities in the region by the number of pixels.

<Description of Step S23>

 In step S23, similar image search is executed on the basis of the above image feature amounts. The hard disk device 106 stores N image data, and the feature
15 amounts of each image are calculated in advance in accordance with the same procedure as described above and stored. The image data can be stored using a standard file format such as JPEG or Flashpix or stored in a so-called RDBMS (Relational DataBase Management
20 System) using a unique format. Assume that image feature amounts are stored in a two-dimensional array $D(n,j)$ having a size of $N \times 18$ (n is an image number, and j is a region/color component number; in this embodiment, $0 \leq n < N$, and $0 \leq j < 18$). The feature
25 amounts of a drawn image are stored in the array $d(j)$ (j is a region/color component number; $0 \leq j < 18$). In

this embodiment, 0-17 are allocated to the region/color numbers in order such as R, G and B of region (0,0), R, G and B of region (1,0) ... R, G and B of region (2,1).

An inter-image distance $S(n)$ between a presented
5 image and the n th image is defined by

$$S(n) = \sum_i (D(n,i) - d(i))^2$$

It is determined that the similarity is high as the inter-image distance becomes small. First, the inter-image distance $S(n)$ ($0 \leq n < N$) between the
10 presented image and each of all the N images is calculated, and then M ($0 < M < N$) images are selected sequentially in ascending order of the inter-image distances $S(n)$, thereby executing similar image search. The processing of calculating the inter-image distance
15 $S(n)$ and the processing of selecting M images will be described below with reference to the flow charts in Figs. 7 and 8, respectively.

Referring to Fig. 7, in step S71, a variable n is initialized to value "0". In step S72, the variable
20 i and inter-image distance $S(n)$ are initialized to value "0".

In step S73, it is determined whether the current region should be regarded as an "important region". As described above, the "entire image" or "central
25 portion" is set as an important region using the setting menu 39. When the "central portion" is set as

an important region, the center of the image corresponds to two regions (1,0) and (1,1) because the image data is segmented into six regions in extracting the feature amounts, as shown in Fig. 4, in this embodiment. These correspond to region/color component numbers 3 to 5 and 12 to 14. Hence, in step S73, when $i = 3$ and $i = 12$, it is determined that the current region is an important region. When $i = 3$ or $i = 12$, the flow branches to step S74; otherwise, the flow branches to step S75. On the other hand, when the "entire image" is designated as an important region, the flow always branches to step S74.

In step S74, a value "100" is set to a variable A representing a weight. In step S75, a value "25" is set to the variable A. In step S76, the square of the product of $A/100$ and the difference between $D(n,i)$ and $d(i)$ is added to the value $S(n)$. As a result, the similarity in the important region is multiplied by a weight $100/100$, and the similarity in an unimportant region is multiplied by a weight $25/100$, thereby reflecting the contents set by the setting menu 39.

In step S77, the variable i is incremented by three. In step S78, the variable i is compared with 18. If the two values equal, the flow advances to step S79; otherwise, the flow returns to step S73. In step S79, the variable n is incremented by one. In step S710,

the variable n is compared with the value N . If the two values equal, the processing is ended; otherwise, the flow returns to step S72.

The inter-image distance between the presented
5 image and each of all the stored images is stored in the array $S(n)$ calculated in the above way. The inter-image distance is calculated with a weight corresponding to the "important region" or "unimportant region", as described above. Next, the processing of
10 selecting M images sequentially in ascending order of inter-image distances and storing their image numbers in an array $T()$ will be described with reference to Fig. 8.

In step S81, the variable j is initialized to
15 value "0". In step S82, the variable i is initialized to value "0". In step S83, a variable \min is initialized to value "0", and a variable L is initialized to a sufficiently large value. In step S84, the value $S(i)$ is compared to the value L . If $S(i) < L$,
20 the flow advances to step S85; otherwise, the flow advances to step S86.

In step S85, the value i is substituted into the variable \min and the value $S(i)$ is substituted into the value L . In step S86, the variable i is incremented by
25 one. In step S87, the variable i is compared with the value N . If the two values equal, the flow advances to

step S88; otherwise, the flow returns to step S83. In
step S88, the value min is substituted into the array
T(j). In step S89, a sufficiently large value is
substituted into the value S(min). In step S810, the
5 variable j is incremented by one. In step S811, the
variable j is compared with the value M. If the two
values equal, the processing is ended; otherwise, the
flow returns to step S82. With the above processing,
the image numbers are stored in the array T(j) ($0 \leq j <$
10 M) in descending order of similarities to the presented
image.

<Description of Step S24>

Fig. 9 is a view showing an operation window
displayed on the display section 103 in step S24. The
15 thumbnail image (reduced image) of the presented
illustration is displayed in a region 91. The
thumbnail images (reduced images) of similar images
searched by the above processing are displayed in
regions 92a to 92h. An image corresponding to an image
20 number for the highest similarity, i.e., an image
number stored in the array T(0) is displayed in the
region 92a, an image corresponding to the array T(1) is
displayed in the region 92b,.... An image having the
lowest similarity h in these images is displayed in the
25 region 29h. As a thumbnail image, image data stored in
the hard disk can be decoded, reduced, and displayed on

the window. If there is low-resolution image data for an icon, like Flashpix as a standard image format, that image data can be decoded and displayed. When a button 93 is pressed, the next candidates, i.e., images

- 5 corresponding to arrays T(8) to T(15) are displayed in the regions 92a to 92h as thumbnail images. This can be repeated up to T(M-1). When the thumbnail image (or icon) of a candidate image is designated, details of a corresponding image (original image) are displayed.
- 10 When a button 94 is pressed, step S24 is ended.

- When the "central portion" is selected by the list button 39 shown in Fig. 3, similar search with a weight on the central portion of image data can be executed. When the "entire image" is selected, normal
- 15 similar image search can be executed.

- In this embodiment, as values set to the variable A, 100 is used as the value on the weighted side, and 25 is used on the other side. However, the present invention is not limited to this. Additionally, in
- 20 this embodiment, two weight values "100" and "25" are used. However, more than two weight values may be used.

- In this embodiment, an image is segmented into six regions, and two regions are defined as the central portion of the image. However, the present invention
- 25 is not limited to this, and the central portion can be set in accordance with the number of segments or

segmentation method.

For example, consider search from a photographic image database. Many photographic data generally have important "objects" at the central portions of the images. Hence, even when the user does not select the "central portion" by the button 38 shown in Fig. 3, processing with "importance on the center" may be executed in the search apparatus. That is, the mode of "importance on the center" may be set as a default state.

[Second Embodiment]

In the first embodiment, the region for calculation with a weight is permanently fixed. More specifically, when "importance on the center" is selected, weight "100" is set for the regions (1,0) and (1,1), and weight "25" is set for the remaining regions. However, the regions can be designated by the user. In the second embodiment, such a case will be described.

As a user interface in this case, the set button 38 shown in Fig. 3 is changed to a region designation button 101, as shown in Fig. 10. When the region designation button 101 is pressed, a rectangular region 102 is displayed in a drawing region 31, as shown in Fig. 10. The position or size of this rectangular region 102 can be changed/designated by the user using

a pointing device such as a mouse.

In inter-image distance calculation processing, when the rectangular region 102 is designated, it is determined in determination processing in step S73 of the flow chart shown in Fig. 7 whether the segmented region is included in the designated rectangular region 102. Thus, the user can designate a rectangular region having an arbitrary position and size as an "important region".

10 The region designated by the user is not limited to a rectangular region. In addition, the size of the rectangular region is not limited to the size of a segmented region in calculating the image feature amount. In this case, however, a segmented region may be partially included in the designated region. In such a case, control is performed to change the value of a variable A in accordance with the state of each segmented region (the ratio of the region belonging to the rectangular region to each segmented region),
15 though the flow branches into two states upon determination processing in step S73 shown in Fig. 7.
20

For example, steps S73 to S75 in Fig. 7 are replaced with steps S720 to S723 in Fig. 11 to determine the weight A. More specifically, first, it is determined in step S720 whether a region is
25 designated by the user. If NO in step S720, the flow

advances to step S723 to set 100 to the value A and
then to step S76. If YES in step S720, the flow
advances from step S720 to S721 to calculate the ratio
of the region designated by the user to the segmented
5 region as P%. In step S722, $(75 \times P/100) + 25$ is
calculated, the obtained value is set to the value A,
and the flow advances to step S76.

The layout of the operation window described in
the above embodiments is not limited. Additionally,
10 although a mouse has been exemplified above as a device
used by the user to draw a sketch image, the present
invention is not limited to this, and a pen tablet or
touch panel may be used.

As described above, according to the first and
15 second embodiments, the user draws an image similar to
the desired image on the computer operation window, the
database system segments the image into a plurality of
regions, extracts the feature amounts in units of
regions, and executes similar image search on the basis
20 of the feature amounts. When similar image search is
executed with a weight on, e.g., the central portion of
the image or a region designated by the user in the
plurality of segmented regions, more complex and
advanced search is possible. Thus, an image search
25 interface capable of executing search while accurately
reflecting the user's intention can be provided.

Instead of remembering the entire image, the user sometimes partially remembers image data as, e.g., an "image having such a thing at a certain portion". In this case, by searching for the image while placing
5 importance on the partial region, the well-remembered portion can be especially "thoroughly" searched. This is quite effective in similar image search using a manually drawn image as a search source image.

10 [Third Embodiment]

The third embodiment will be described next. In the above-described first and second embodiments, the weight used for similarity calculation is changed in accordance with the position in an image. In the third
15 embodiment to be described below, the weight used for similarity calculation is changed in accordance with contents represented by feature amounts.

The arrangement of an image search apparatus and the schematic flow of image search processing in the
20 third embodiment are the same as in the first embodiment (Figs. 1 and 2). In the third embodiment, however, similar image search processing in step S23 is different from the first and second embodiments. The difference from the first and second embodiments will
25 be mainly described below.

In step S21 shown in Fig. 2, a window shown in

Fig. 12 is displayed, and the search source image can be drawn using the same drawing tools as in the first embodiment. Fig. 12 is a view showing the operation window displayed on a display section 103 in the third
5 embodiment. This window is different from that of the first embodiment (Fig. 3) in a setting menu (390) displayed when a set button 38 is clicked.

As in the first embodiment, before pressing a search execution button 37, a condition for similar
10 image search from step S22 can be changed by operating the set button 38. For similarity calculation in similar image search, "importance on luminance" or "importance on color differences" can be selected by pressing the set button 38. When the set button 38 is
15 pressed, the setting menu 390 is displayed, so the user can select one of three conditions "importance on luminance", "importance on color differences", and "NO (importance)".

In step S22 shown in Fig. 2, the same image
20 feature amount calculation as in the first embodiment (Figs. 5 and 6) is executed, and the flow advances to step S23. Similar image search is executed in accordance with the processing procedure shown in Fig. 13.

25 Before executing the flow chart in Fig. 13, variables A and B are set in accordance with the

condition set by the shown in Fig. 12. For "NO", A = B = 50 is set. When "importance on luminance" is selected, for example, A = 75 and B = 25 are set. When "importance on color differences" is selected, for example, A = 25 and B = 75 are set. The values A and B are used for inter-image distance calculation (to be described later) using feature amounts. Calculation with "importance on luminance" and that with "importance on color differences" are switched depending on the values A and B.

When the values A and B are set in the above way, in step S171, the feature amounts of the key image data are converted into a color space represented by the luminance and color differences. In this embodiment, the average values of R, G, and B values are converted into Y, Cb, and Cr values. This conversion is expressed by, e.g.,

$$Y = 0.299R + 0.587G + 0.114B$$

$$Cb = -0.1687R - 0.3323G + 0.5B + 128$$

$$Cr = 0.5R - 0.4187G - 0.0813B + 128$$

At this time, to save the memory, the Y, Cb, and Cr values may be stored in the area where the average values of R, G, and B values have been stored. In step S172, a variable n is initialed to value "0". In step S173, the feature amounts of the nth image data stored in the image database are converted into Y, Cb, and Cr

values, as in step S171. In step S174, variables i and $S(n)$ are initialized to value "0".

In step S175, the square of the product of $A/100$ or $B/100$ and the difference between $D(n,i)$ and $d(i)$ is
5 added to the value $S(n)$. In this example, the
luminance value (Y) is stored in $D(n,i)$ and $d(i)$, the
color difference value (Cb) is stored in $D(n,i+1)$ and
 $d(i+1)$, and the color difference value (Cr) is stored
in $D(n,i+2)$ and $d(i+2)$. Hence, $(D(n,i) - d(i))$ is
10 multiplied by $A/100$, and $(D(n,i+1) - d(i+1))$ and
 $(D(n,i+2) - d(i+2))$ are multiplied by $B/100$.

In step S176, the variable i is incremented by
three. In step S177, the variable i is compared with
18. If the two values equal, the flow advances to step
15 S178; otherwise, the flow returns to step S175. In
step S178, the variable n is incremented by one. In
step S179, the variable n is compared with the value N .
If the two values equal, the processing is ended;
otherwise, the flow returns to step S173.

20 The inter-image distance between the presented
image and each of all the stored images is stored in
the array $S(n)$ calculated in the above way. The
inter-image distance is calculated with a weight
corresponding to the "importance on luminance " or
25 "importance on color differences ", as described above.
Next, the processing of selecting M images sequentially

in ascending order of inter-image distances and storing their image numbers in an array T() is executed. This processing is the same as described above with reference to Fig. 8.

5 With the above processing, when the "importance on luminance " is selected by the setting menu 390 shown in Fig. 12, similar search with a weight on "luminance" can be executed. When the "importance on color differences" is selected, similar image search
10 with a weight on "color difference" can be executed.

 In this embodiment, as values set to the variables A and B, 75 is used as the value on the important side, and 25 is used on the other side. However, the present invention is not limited to this.

15 [Fourth Embodiment]

 In the third embodiment, the values A and B used for calculation with a weight are permanently fixed. In the fourth embodiment, values A and B can be
20 designated by the user.

 In this case, instead of the setting menu 390 shown in Fig. 12, a scroll bar is used as a user interface, as shown in Fig. 14. Control is executed such that when a mark 201 is at the left end,
25 calculation is performed with a weight on only the "luminance", when the mark 201 is at right end,

calculation is performed with a weight on only the
"color difference", and when the mark 201 is at the
center, calculation is performed with the same weight
on the "luminance" and "color difference". More
5 specifically, in the fourth embodiment, the values A
and B for weighted similar image search processing
(Fig. 13) described in the third embodiment are
controlled within the range of $0 \leq A < 100$ and $0 \leq B <$
100. For example, $A = 100$ and $B = 0$ at the left end, A
10 $= 0$ and $B = 100$ at the right end, and $A = B = 50$ at the
intermediate position.

In the third and fourth embodiments, as the
feature amounts of image data, the average values of
the R, G, and B values are temporarily calculated and
15 then converted into Y, Cb, and Cr values. However, the
present invention is not limited to this, and the Y, Cb,
and Cr values may be calculated from the beginning.

In addition, the layout of the operation window
operated by the user is not limited to that of the
20 above embodiments.

Further, although a mouse has been exemplified
above as a device used by the user to draw a sketch
image, the present invention is not limited to this,
and a pen tablet or touch panel may be used.

25 As described above, in the third and fourth
embodiments, a sketch pad is prepared on the computer

operation window, the user draws an image similar to the desired image on the window, and the database system extracts the feature amounts from the image and executes similar image search on the basis of the
5 feature amounts.

When similar image search is executed by generating luminance information and color difference information from the feature amounts of the image data and placing importance on the luminance or color
10 difference, more complex search is possible. Thus, an image search interface capable of executing search while accurately reflecting the user's intention can be provided.

As described above, according to the third and
15 fourth embodiments, for example, when "importance on luminance" is set, search can be executed mainly in consideration of "bright" or "dark" but not the chrominance information (color differences). For this reason, the ambiguity for image colors remembered by
20 the user can be compensated, and effective image search can be executed. In some cases, the user remembers not "colors" but "shapes" well. In this case as well, a satisfactory result can be obtained by search with "importance on luminance".

25 According to the above embodiment, for example, when settings of the scroll bar shown in Fig. 14 are

changed in various ways, many search conditions can be generated from a drawn image. Hence, the user need not redraw the key search image many times.

The present invention can be applied to a system
5 constituted by a plurality of devices (e.g., a host computer, interface device, reader, and printer) or an apparatus constituted by a single device (e.g., a copying machine or facsimile apparatus).

The object of the present invention can also be
10 achieved when a storage medium (or recording medium) storing software program codes for realizing the functions of the above-described embodiments is supplied to a system or apparatus, and the computer (or a CPU or an MPU) of the system or apparatus reads out and
15 executes the program codes stored in the storage medium. In this case, the program codes read out from the storage medium realize the functions of the above-described embodiments by themselves, and the storage medium storing the program codes constitutes the
20 present invention. The functions of the above-described embodiments are also realized not only when the readout program codes are executed by the computer but also when the OS (Operating System) running on the computer performs part or all of actual processing on the basis
25 of the instructions of the program codes.

The functions of the above-described embodiments

are also realized when the program codes read out from
the storage medium are written in the memory of a
function expansion card inserted into the computer or a
function expansion unit connected to the computer, and
5 the CPU of the function expansion card or function
expansion unit performs part or all of actual processing
on the basis of the instructions of the program codes.

As many apparently widely different embodiments of
the present invention can be made without departing from
10 the spirit and scope thereof, it is to be understood
that the invention is not limited to the specific
embodiments thereof except as defined in the claims.

WHAT IS CLAIMED IS:

1. An image search method of searching for a desired image from a plurality of images stored in storage means, comprising:

5 the setting step of setting a weight value in correspondence with a property of feature amount used in similarity calculation of the image;

the calculation step of calculating similarity between a designated search source image and each of
10 the plurality of images on the basis of a feature amount of the designated search source image, a feature amount of each of the plurality of images, and the weight value set in the setting step; and

the acquisition step of acquiring an image as a
15 search result from the plurality of images on the basis of the image similarity calculated in the calculation step.

2. The method according to claim 1, wherein the calculation step comprises performing similarity
20 calculation in units of properties using the feature amount of the search source image and the feature amount of each of the plurality of images and integrating obtained results with the weight to obtain the similarity.

25 3. The method according to claim 1, wherein said method further comprises the drawing step of

allowing an operator to interactively draw an image,
and

the search source image is the image drawn in the
drawing step.

5 4. The method according to claim 2, wherein the
setting step comprises setting the weight in units of
regions obtained by segmenting the image into a
plurality of regions.

5. The method according to claim 4, wherein the
10 calculation step comprises segmenting each of two
images as processing targets into a plurality of
segmented regions, performing similarity calculation in
units of segmented regions using the feature amount,
and integrating results obtained in units of regions
15 with the weight set in the setting step to obtain the
similarity.

6. The method according to claim 1, wherein the
setting step comprises setting a high weight in a
region at a central portion of the image.

20 7. The method according to claim 1, wherein the
setting step comprises setting a high weight in a
region arbitrarily designated in the search source
image.

8. The method according to claim 1, further
25 comprising the display step of displaying an image
representing the image acquired in the acquisition step

as the search result.

9. The method according to claim 8, wherein the display step comprises displaying a thumbnail image of the image acquired in the acquisition step.

5 10. The method according to claim 8, wherein the display step comprises displaying an icon image corresponding to the image acquired in the acquisition step.

10 11. The method according to claim 8, wherein the display step comprises, when one of displayed images is selected, displaying details of an image linked to the image.

15 12. The method according to claim 8, wherein the display step comprises displaying extracted images in an order of similarities.

13. The method according to claim 2, wherein the setting step comprises setting the weight in units of attributes of a color space.

20 14. The method according to claim 13, wherein the setting step comprises setting different weights for a feature amount representing luminance and a feature amount representing a color difference.

25 15. The method according to claim 14, wherein the calculation step comprises executing similarity calculation using feature amounts corresponding to a YCbCr color space and integrating obtained results with

the weights to obtain the similarity.

16. An image search apparatus for searching for a desired image from a plurality of images stored in storage means, comprising:

5 setting means for setting a weight value in correspondence with a property of feature amount used in similarity calculation of the image;

 calculation means for calculating similarity between a designated search source image and each of
10 the plurality of images on the basis of a feature amount of the designated search source image, a feature amount of each of the plurality of images, and the weight value set by said setting means; and

 acquisition means for acquiring an image as a
15 search result from the plurality of images on the basis of the image similarity calculated by said calculation means.

17. The apparatus according to claim 16, wherein said calculation means performs similarity calculation in
20 units of properties using the feature amount of the search source image and the feature amount of each of the plurality of images and integrates obtained results with the weight to obtain the similarity.

18. The apparatus according to claim 16, wherein
25 said apparatus further comprises drawing means for allowing an operator to interactively draw an image,

and

the search source image is the image drawn by
said drawing means.

19. The apparatus according to claim 17, wherein said
5 setting means sets the weight in units of regions
obtained by segmenting the image into a plurality of
regions.

20. The apparatus according to claim 19, wherein said
calculation means segments each of two images as
10 processing targets into a plurality of segmented
regions, performs similarity calculation in units of
segmented regions using the feature amount, and
integrates results obtained in units of regions with
the weight set by said setting means to obtain the
15 similarity.

21. The apparatus according to claim 16, wherein said
setting means sets a high weight in a region at a
central portion of the image.

22. The apparatus according to claim 16, wherein said
20 setting means sets a high weight in a region
arbitrarily designated in the search source image.

23. The apparatus according to claim 16, further
comprising display means for displaying an image
representing the image acquired by said acquisition
25 means as the search result.

24. The apparatus according to claim 23, wherein said

display means displays a thumbnail image of the image acquired by said acquisition means.

25. The apparatus according to claim 23, wherein said display means displays an icon image corresponding to
5 the image acquired by said acquisition means.

26. The apparatus according to claim 23, wherein when one of displayed images is selected, said display means displays details of an image linked to the image.

27. The apparatus according to claim 23, wherein said
10 display means displays extracted images in an order of similarities.

28. The apparatus according to claim 17, wherein said setting means sets the weight in units of attributes of a color space.

29. The apparatus according to claim 28, wherein said
15 setting means sets different weights for a feature amount representing luminance and a feature amount representing a color difference.

30. The apparatus according to claim 29, wherein said
20 calculation means executes similarity calculation using feature amounts corresponding to a YCbCr color space and integrates obtained results with the weights to obtain the similarity.

31. A storage medium which stores a control program
25 for causing a computer to realize processing of searching for a desired image from a plurality of

images stored in storage means, said control program comprising:

- 5 a code of the setting step of setting a weight value in correspondence with a property of feature amount used in similarity calculation of the image;
- 10 a code of the calculation step of calculating similarity between a designated search source image and each of the plurality of images on the basis of a feature amount of the designated search source image, a feature amount of each of the plurality of images, and the weight value set in the setting step; and
- 15 a code of the acquisition step of acquiring an image as a search result from the plurality of images on the basis of the image similarity calculated in the calculation step.

ABSTRACT OF THE DISCLOSURE

In searching for a desired image from an external storage device which stores a plurality of images, similarity between a designated search source image and
5 each of the plurality of images is calculated on the basis of the feature amount of the designated search source image and the feature amounts of the plurality of images. A similar image is extracted from the plurality of images on the basis of the calculated
10 image similarity. In calculating the similarity, an image is segmented into a plurality of regions, different weights are set for the respective regions, and the similarity is calculated using the set weights.

FIG. 1

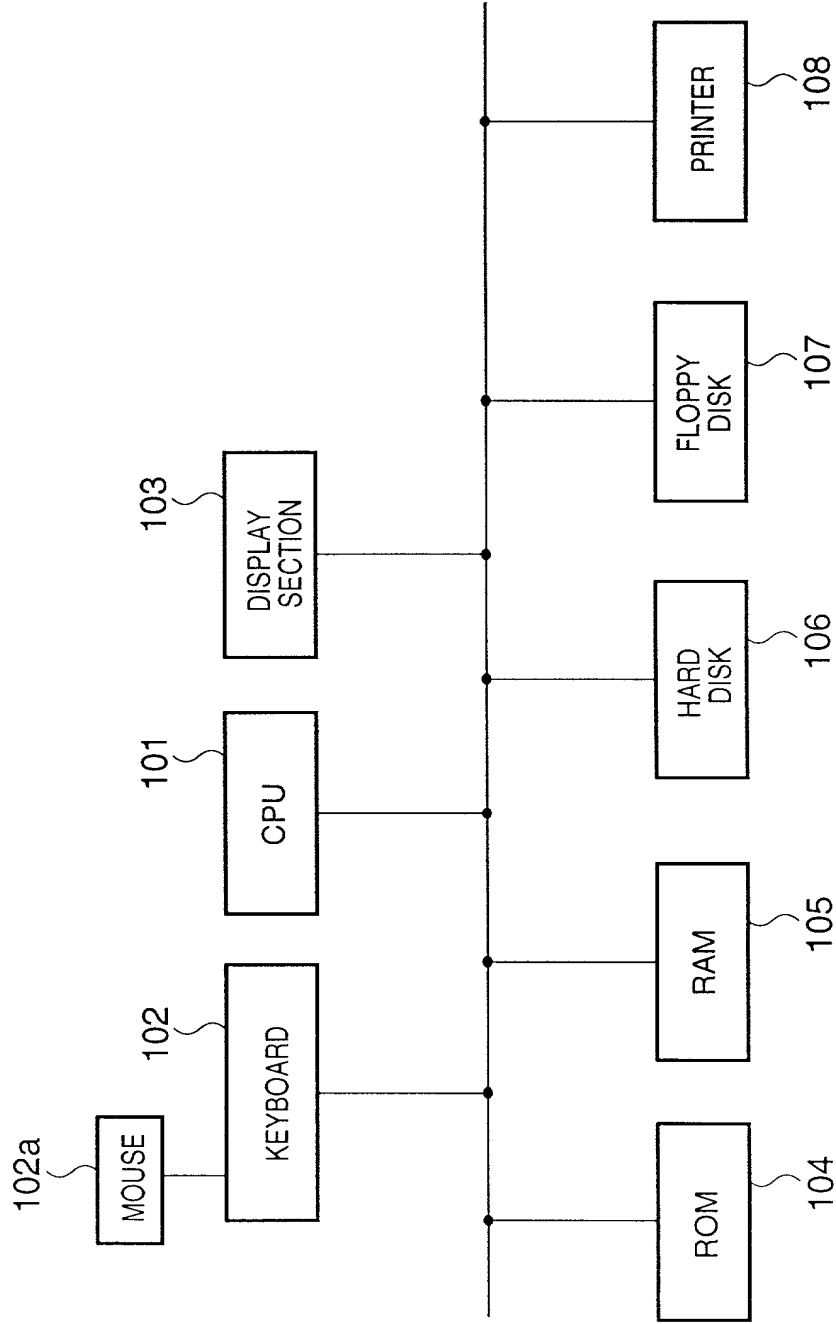


FIG. 2

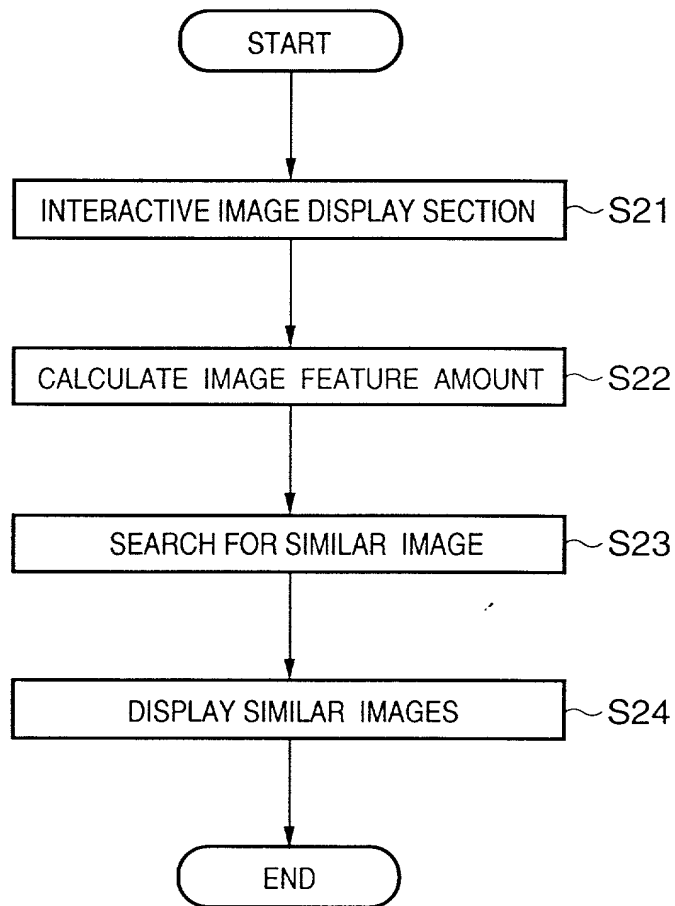


FIG. 3

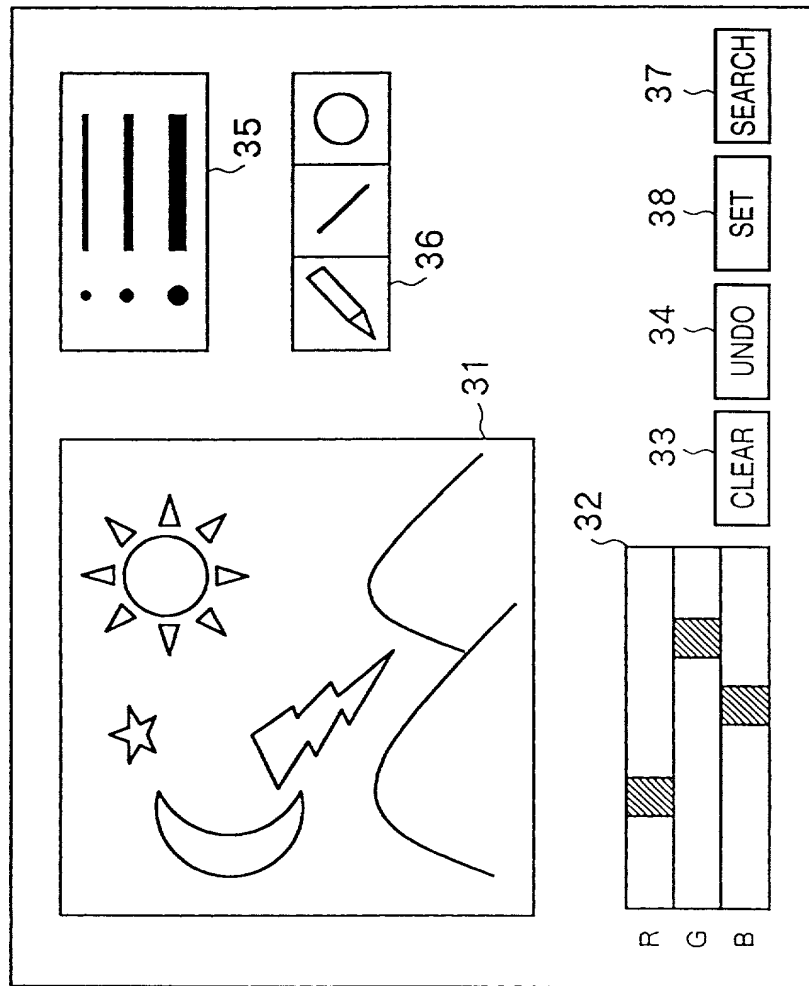


FIG. 4

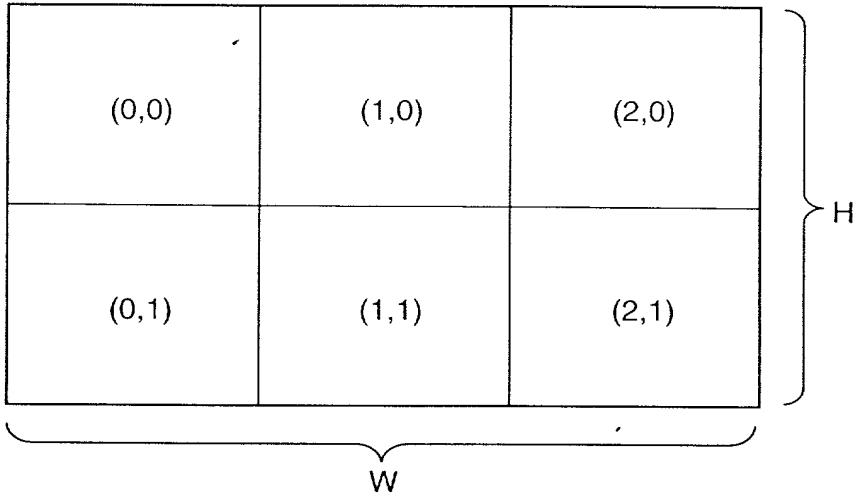


FIG. 5

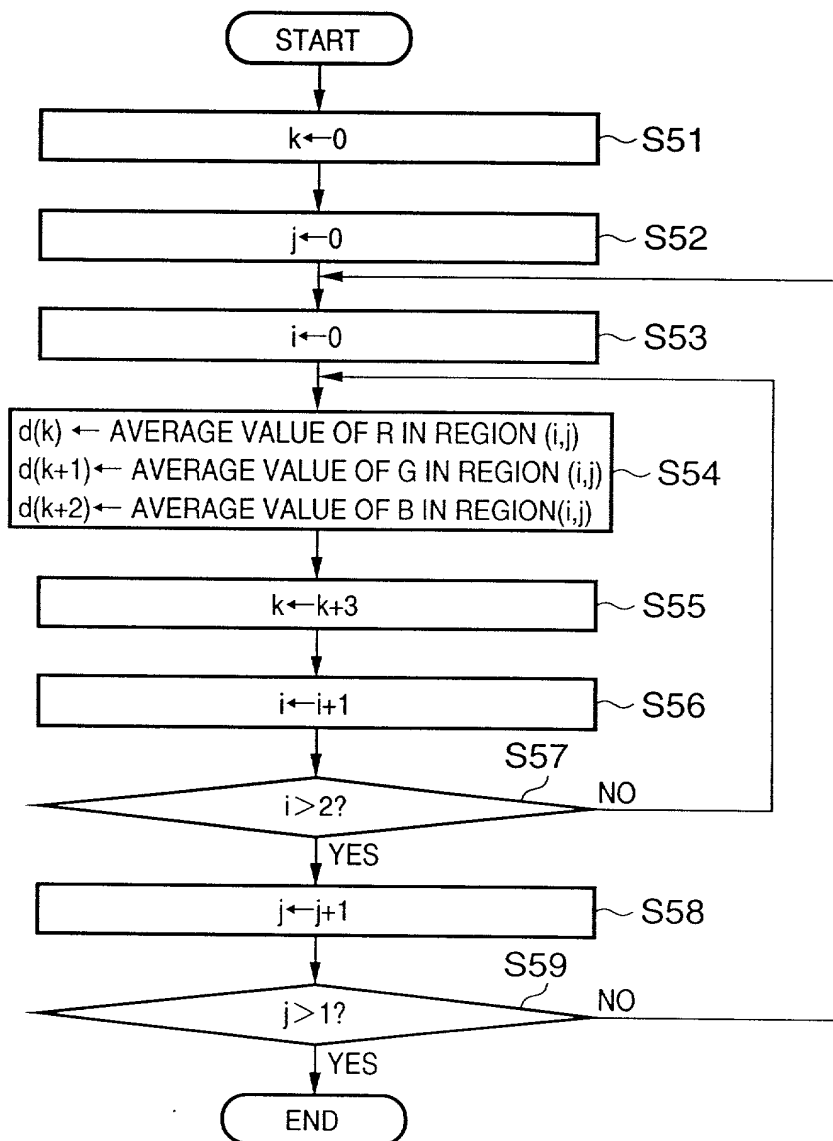


FIG. 6

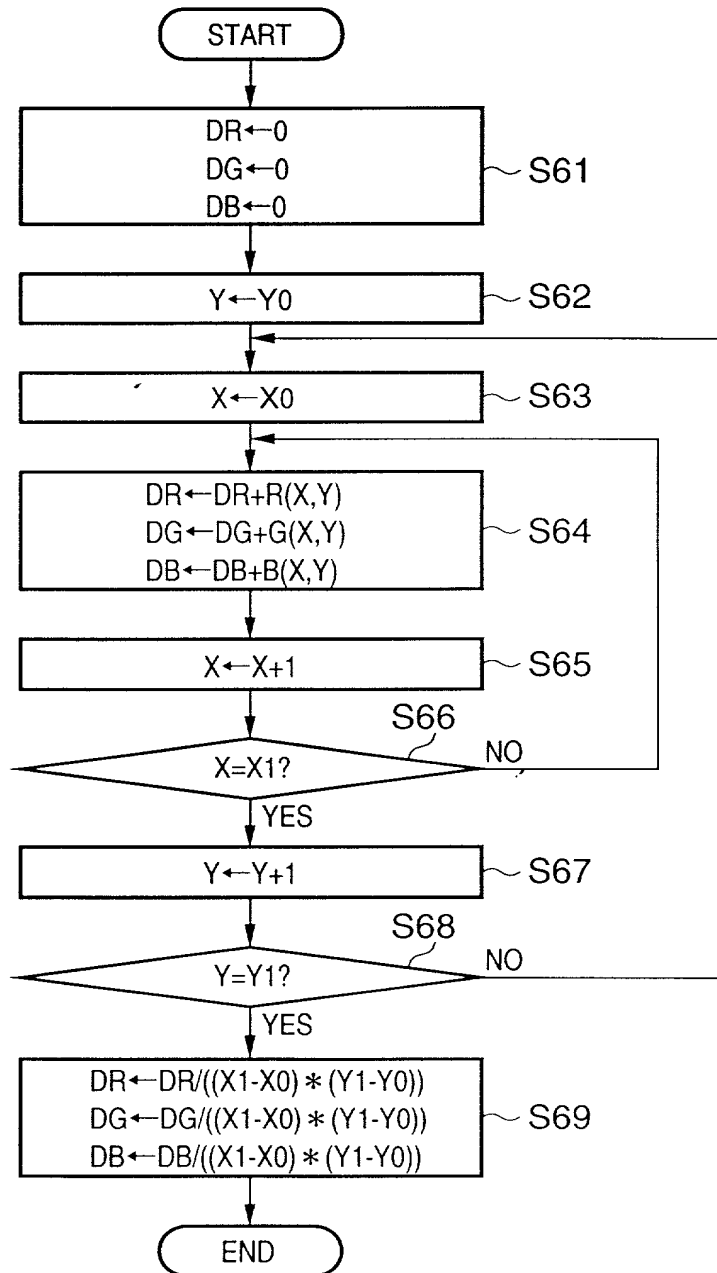


FIG. 7

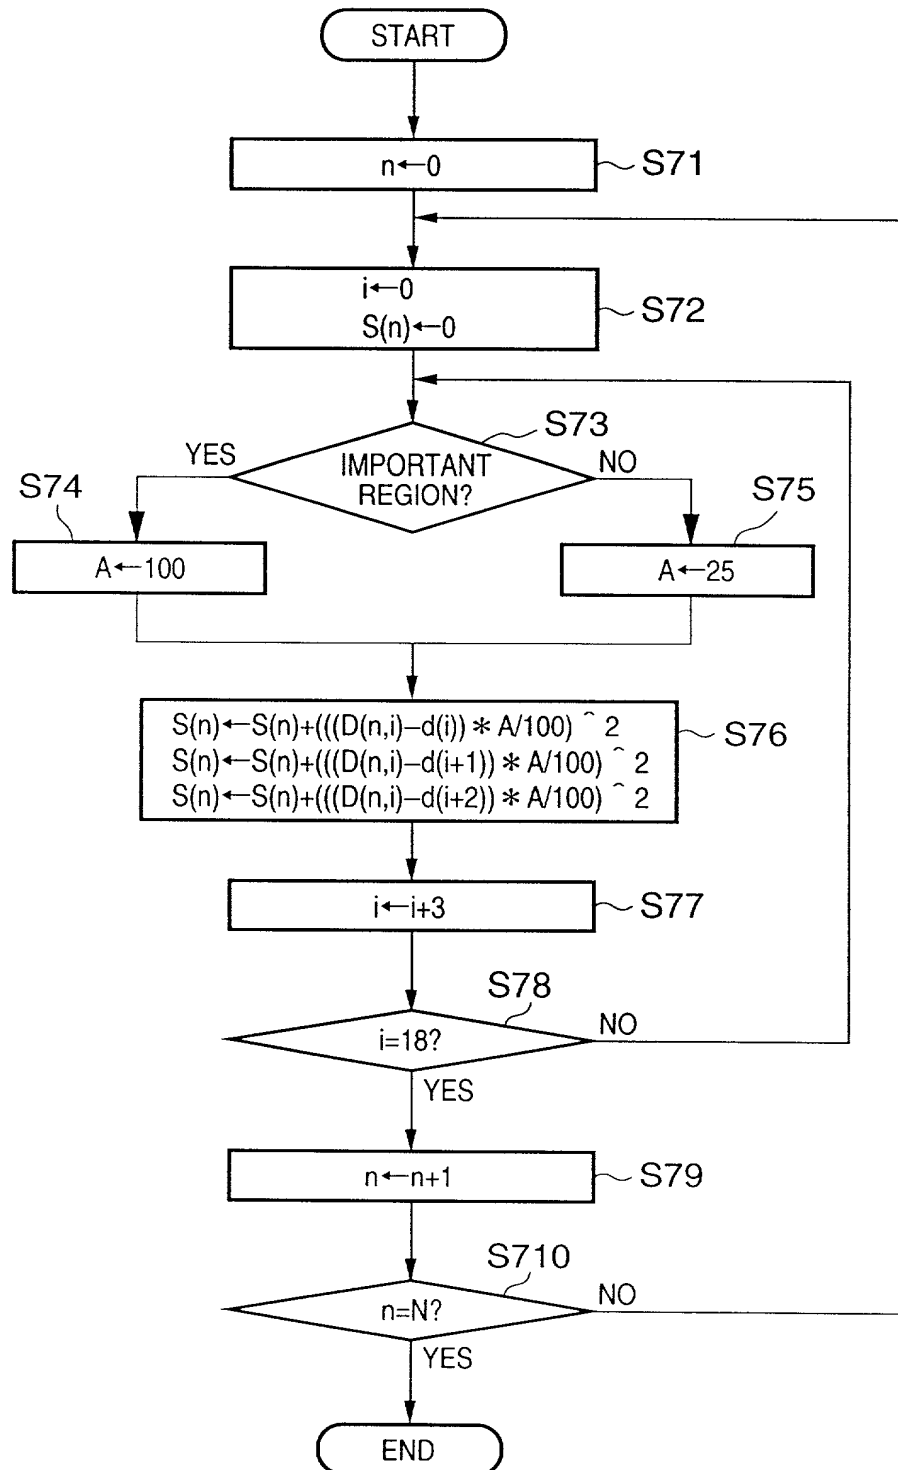


FIG. 8

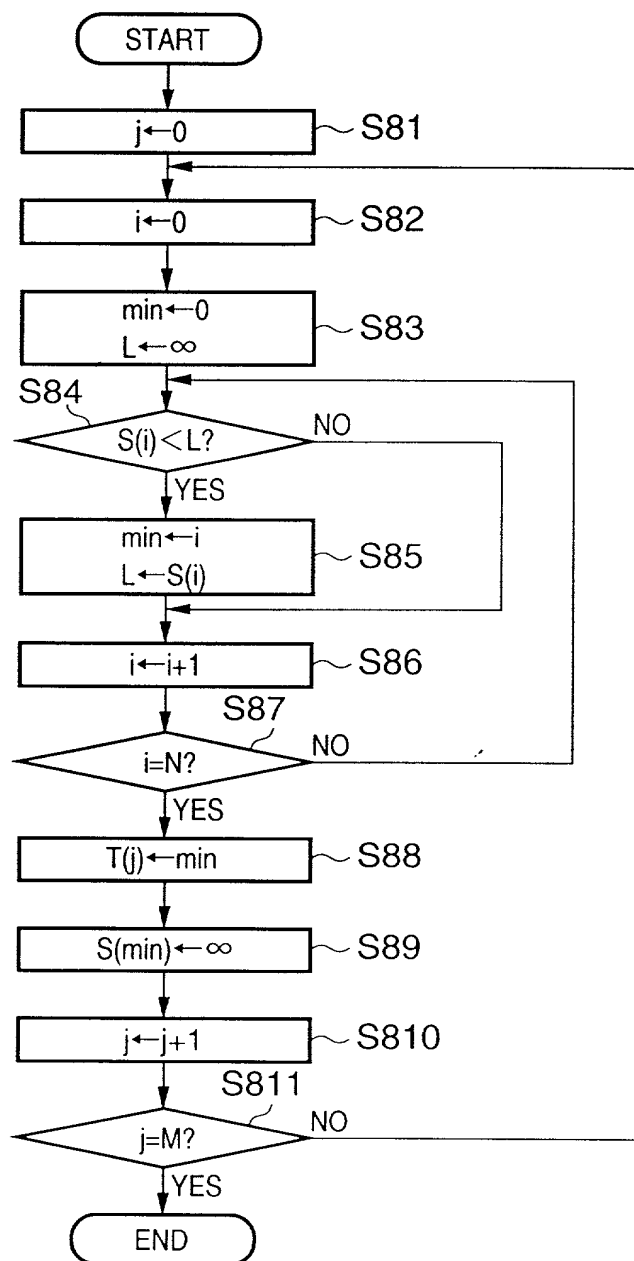


FIG. 9

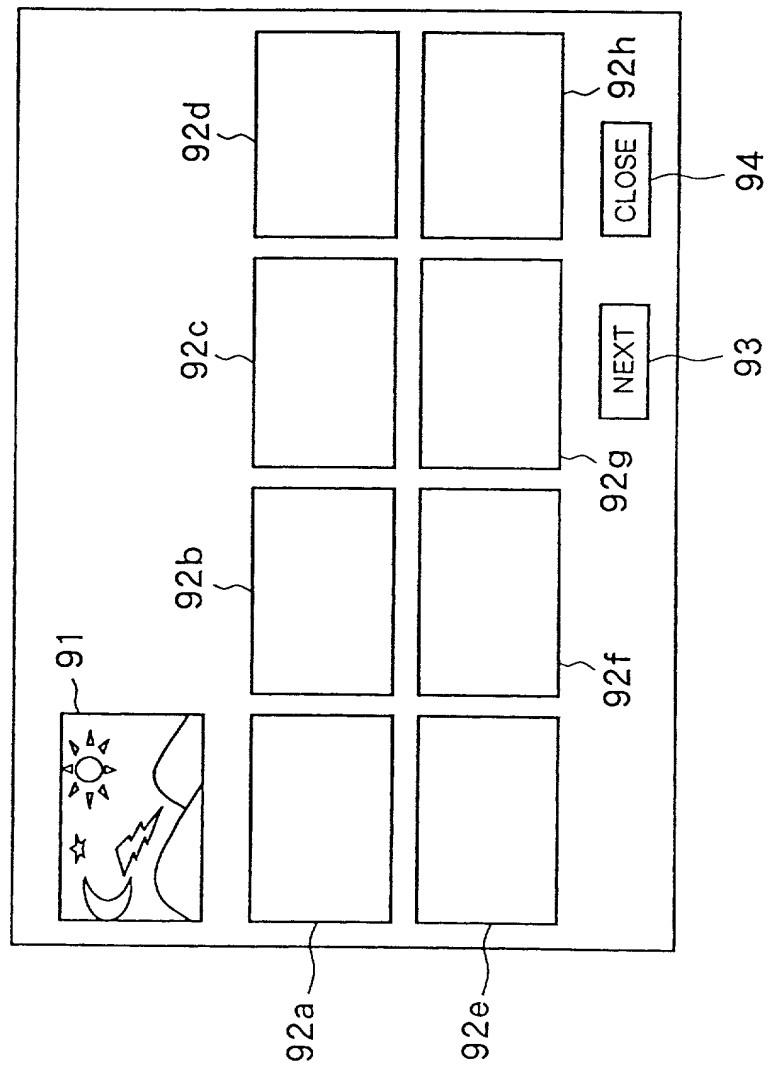


FIG. 10

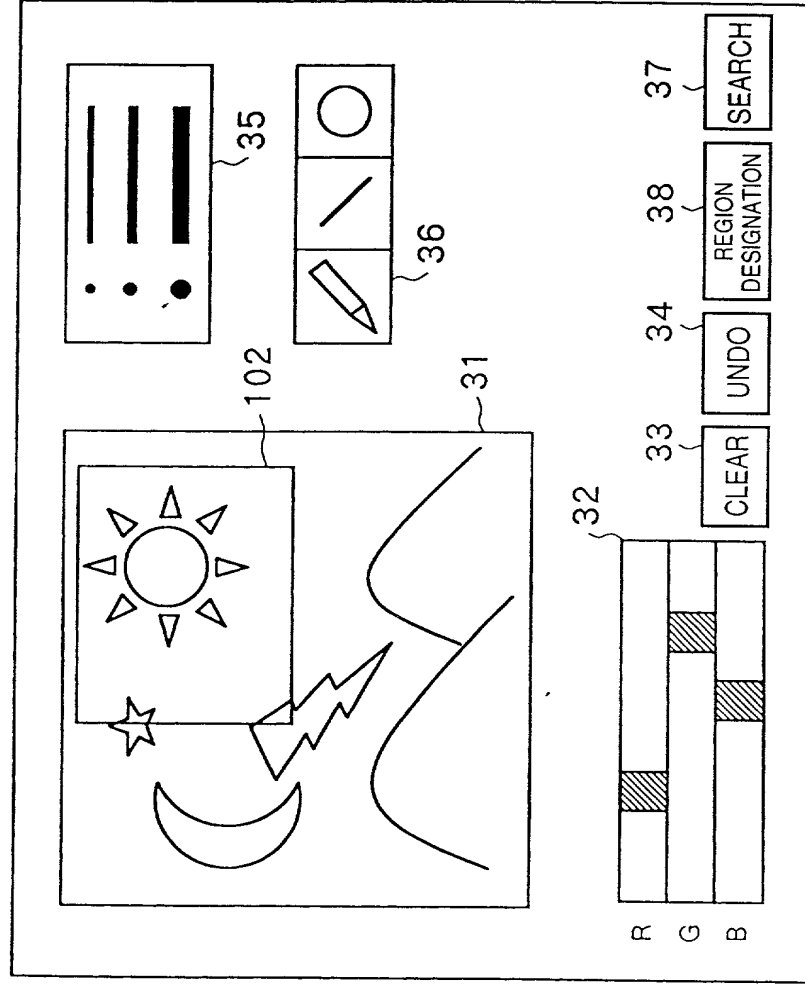


FIG. 11

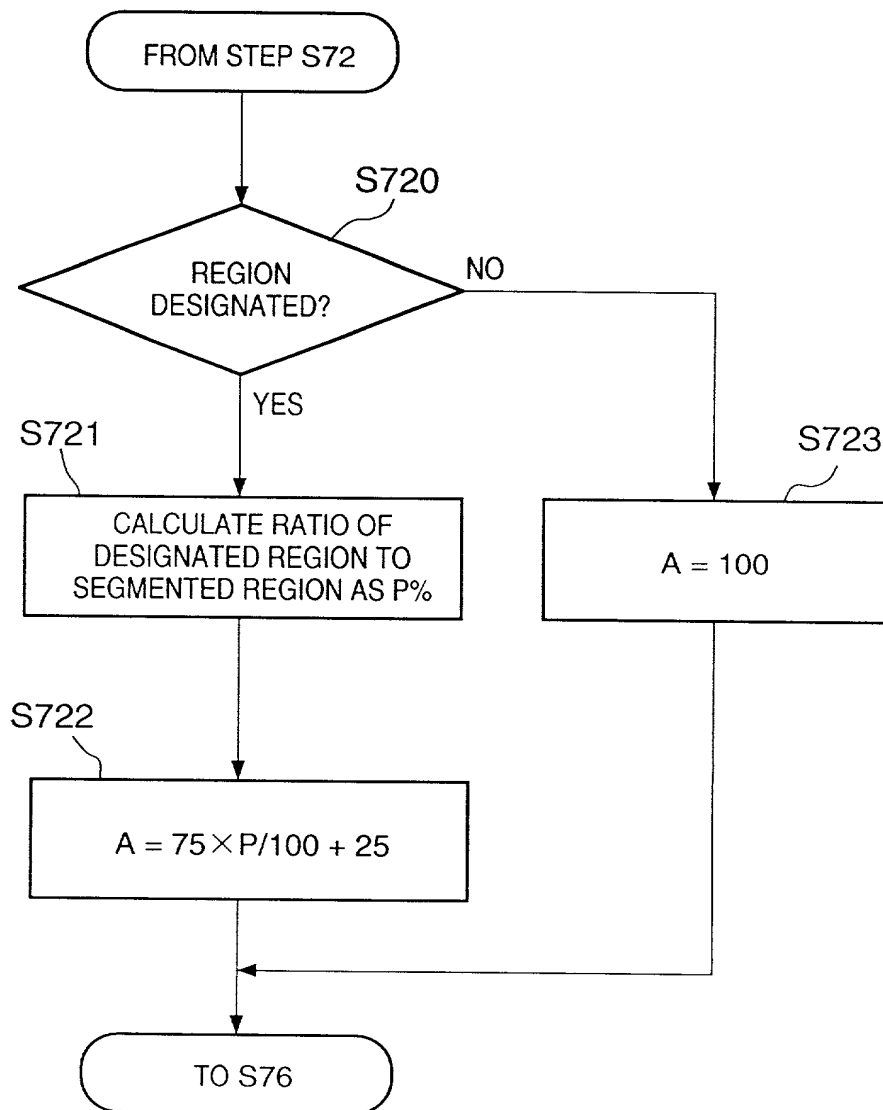


FIG. 12

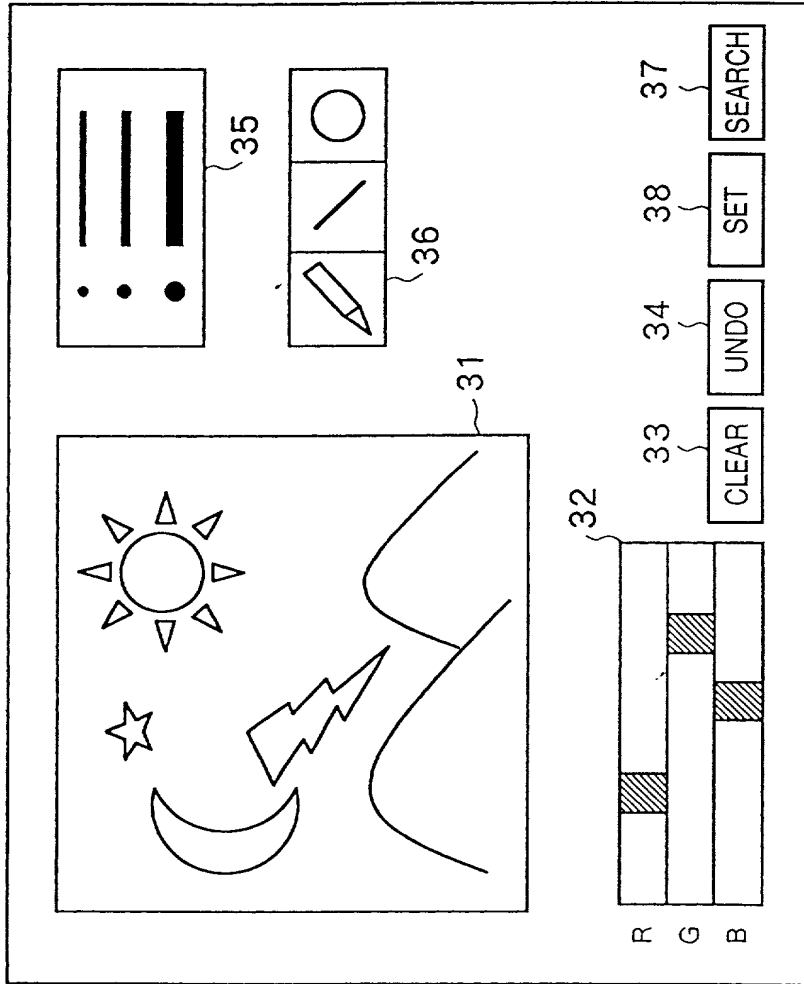


FIG. 13

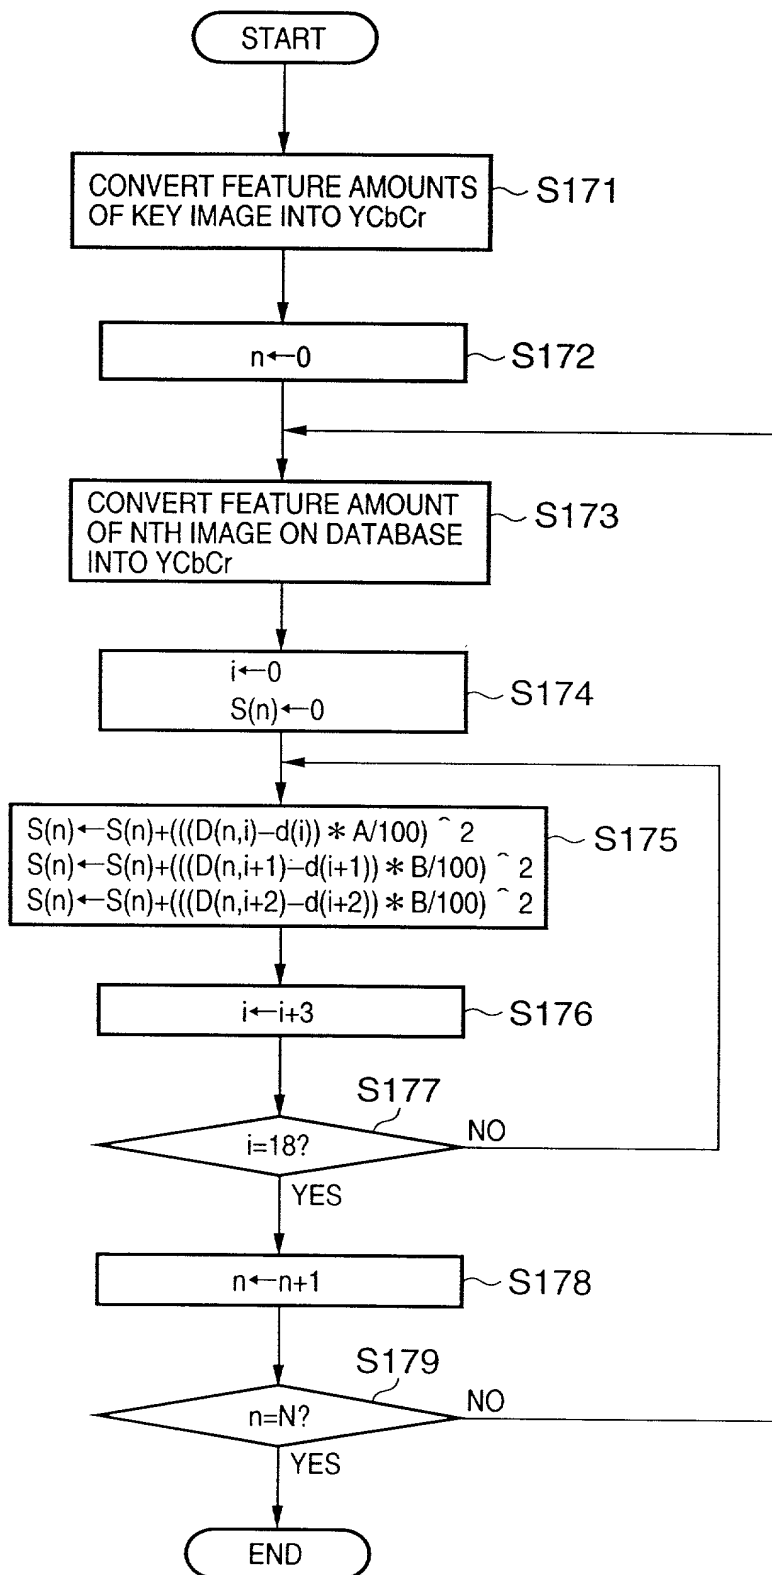


FIG. 14

